

ViewSonic® VIEWBOARD IFP6550


Key Features

- 20-Point Multi-Touch
- Floating Pen - Annotation on Demand
- ViewBoard® Cast Content Sharing Software
- Built-in ARM Quad-core CPU with 16GB Storage
- Out-of-Box Collaboration



Product Description

Featuring 4K Ultra HD resolution and an immersive 20-point touch screen, the ViewSonic® ViewBoard® IFP6550 delivers incredible collaborative capabilities for 21st century boardrooms and classrooms. With astonishing 20-point simultaneous touch capabilities and pre-installed ViewSonic myViewBoard™ whiteboarding software, this 65" interactive flat panel lets multiple users write or draw on the screen with their fingers and styluses. With a built-in quad-core processor, as well as versatile connectivity options including multiple HDMI, VGA, RS232, RJ45, and USB ports, this display provides powerful computing for annotation and multimedia playback without the need for a PC. This display delivers optional slot-in PC capability, for more computing-intensive interactive applications. The IFP6550 features a VESA-compatible design and can be placed on a wall mount, or on an optional trolley cart for flexible installation in classrooms and corporate meeting rooms.

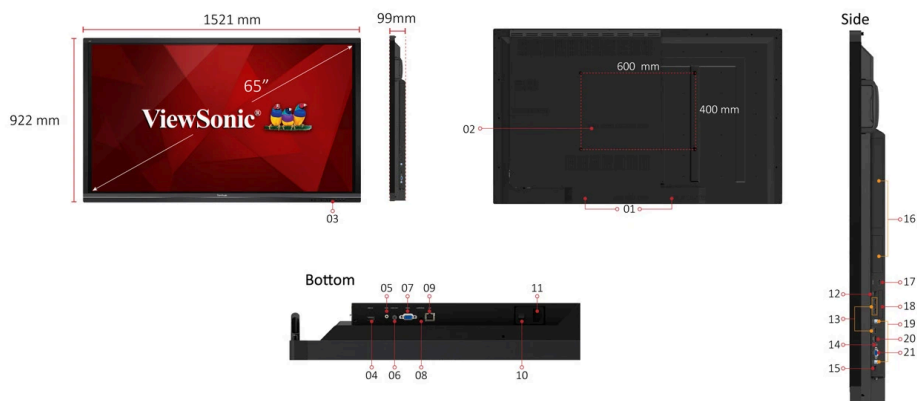

- | | | | |
|--------------------------------|--------------------|-----------------------------|------------|
| 1. SPEAKERS | 8. AUDIO OUT | 15. USB 2.0 & 3.0 | 21. VGA IN |
| 2. VESA® WALL Mount 600x400 mm | 9. RJ45 (LAN) | 16. PC SLOT | |
| 3. MENU CONTROLS | 10. POWER ON / OFF | 17. HDMI OUT | |
| 4. USB 2.0 | 11. AC IN | 18. WIFI & BLUETOOTH MODULE | |
| 5. CVBS IN (AV IN) | 12. USB 2.0 & 3.0 | SLOT | |
| 6. SPDIF (COAX OUT) | 13. HDMI IN | 19. USB 2.0 (Touch) | |
| 7. RS232 IN | 14. AUDIO IN | 20. DisplayPort | |

Visit Us

www.viewsonic.com

LCD PANEL

Panel Size:	65"
Type/ Tech:	TFT LCD Module with DLED Backlight
Display Area (mm):	1431 (H) x 807 (V) (64.5" diagonal)
Aspect Ratio:	16:9
Resolution:	3840 x 2160
Colors:	1.07B colors (10bit)
Brightness:	350 nits (typ.) 300 nits (min.)
Contrast Ratio:	1200:1 (typ.)
Response Time:	8 ms
Viewing Angles:	H = 178, V = 178 (typ.)
Backlight:	DLED
Backlight Life:	30,000 Hours Min.
Hardness:	7H

TOUCH

Type/ Tech:	IR Recognition
Touch Resolution:	32767 x 32767
Touch Point:	20 points touch, 10 points writing
Response Time:	<15ms
System:	Windows 10 / Windows 8 / Windows 7 / Windows XP / Vista / Linux / Mac / Android / Wince / Chrome
Life Time:	80,000hrs

INPUT

HDMI:	x 3
RGB / VGA:	x 1
DisplayPort:	x 1
Audio:	x 1
CVBS (AV):	x 1
RS232:	x 1
PC Slot:	x 2

OUTPUT

HDMI:	x 1 (for all sources)
Audio (Earphone out):	x 1
SPDIF:	x 1

LAN

RJ45:	x 1
-------	-----

USB

2.0 Type A:	x 4 (front x 2, for both embedded player and slot-in PC)
3.0 Type A:	x 2 (front x 1, for both embedded player and slot-in PC)
2.0 Type B (For touch):	x 2

SPEAKERS

16W x 2

BUILT-IN PC

Processor:	ARM Cortex A53 Quad Core 1.2G Hz CPU
Graphic:	ARM Mali-450 Quad Core
Memory:	2GB DDR3
Storage:	16GB eMMC
Networking:	10/100M auto-identification and DHCP

COMPATIBILITY

VGA:	Refer to timing table
HDMI:	3840x2160
DP:	3840x2160
CVBS:	480i

POWER

Voltage:	100-240VAC +/- 10% Wide Range
Consumption:	190W(Typ, without Slot-In PC); 285W(Typ, Including Slot-In PC)

ERGONOMICS

Wall Mount (VESA®):	600 x 400mm; Screw: M8 x 25mm
---------------------	-------------------------------

OPERATING CONDITIONS

Temperature (° C):	32°F to 104°F (0°C to 40°C)
Humidity:	10% ~ 90% non-condensing

DIMENSIONS (W X H X D)

Physical w/o Stand (mm / inch):	1521 x 922 x 99 / 59.9 x 36.3 x 3.9
Packaging (mm / inch):	1697 x 1071 x 220 / 66.81 x 42.17 x 8.66

WEIGHT

Net (kg / lb):	47kg / 103.62lbs
Gross (kg / lb):	60kg / 132.28lbs

REGULATIONS

Standard:	FCC, cTUVus, CE, CB, RCM
-----------	--------------------------

WHAT'S IN THE BOX?

VGA cable(5 meters)/Power cable(3 meters) x 4/Remote control/USB cable(5 meters)/Audio cable(5 meters)/AV cable/Touching pen x 3/User manual CD wizard/Quick Start Guide/RS232 adapter/Clamp x 5/Plate/Screw x 3

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.